

SPALDING seating

SEAT - PRODUCT DETAILS

Spalding seat with back

The Spalding seat consists of front to back seat slats, bolted onto a mild steel frame with tubular mild steel legs. Seats can be straight, curved or a combination of both.

The seat is available with a choice of materials and finishes to suit your scheme and budget.

Materials

Slats - can be either FSC®-certified treated redwood, FSC®-certified hardwood or mild steel RHS.

Frames and legs - will be fully welded mild steel.

Finishes

Timber - as standard, will be supplied with a natural finish.

Stained finish is also available.

Mild steel - as standard, will be supplied with a hot dip galvanised finish.

After galvanising, a polyester powder coated finish is also available.

Options

Choose whether the seat is to be straight or curved, the bench lengths, curved seat radius, material, finishes and installation type.

Accessories

Optional armrest available on request.

Delivery

Depending on the size or complexity, the seats will be factory assembled and delivered to site fully assembled, for off loading and placing in position.



Street Design

Unit 35 Hayhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD
01509 815335 sdl@street-design.com www.street-design.com

UK Street Furniture Designers & Manufacturers




*Spalding straight seat, in natural finish
FSC®-certified treated redwood slats with
galvanised frame and legs*



*Spalding curved seat, in natural finish
FSC®-certified hardwood slats with optional
powder coated frame, legs and armrest*


Installation options

Spalding straight and curved seats can be supplied for installation above or below finished ground level



Above ground installation


The assembled Spalding seat will be secured to the finished ground level with suitable fixings for the surface type.

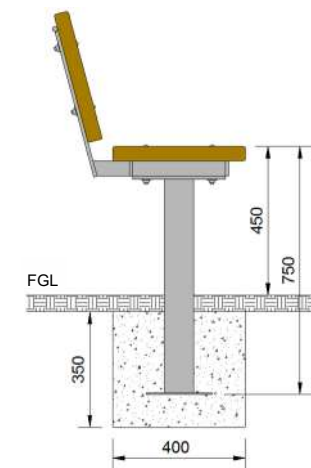

Below ground installation

The assembled Spalding seat will be set into concrete foundations 500x400x350mm deep.

Overall dimensions

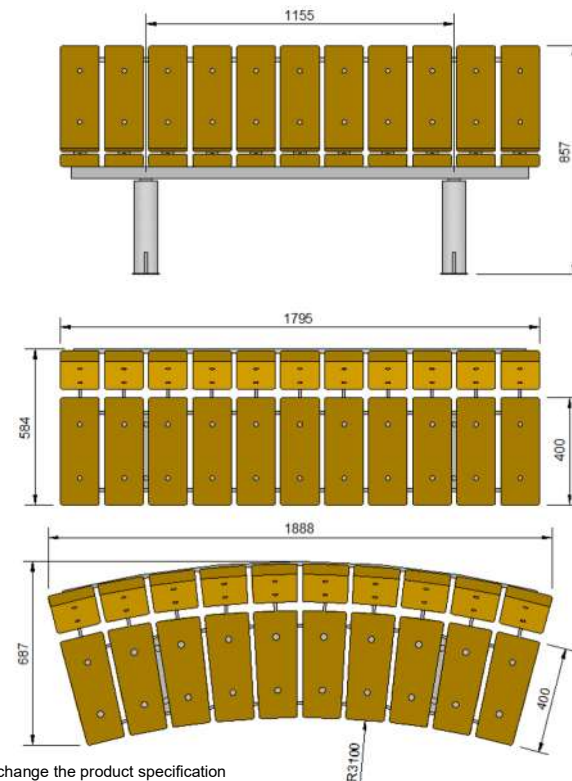

The standard Spalding straight seat will be 1795mm long. Other lengths can be supplied on request.

The standard Spalding curved seat will have an internal radius of 3100mm. Other radii can be supplied on request.