



'Look for FSC® certified products'

The mark of responsible forestry



#### Unit 35 Hayhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD 01509 815335 sdl@street-design.com www.street-design.com

**WK Street Furniture Designers & Manufacturers** 

# **ROCHFORD** seating

Rochford benches are available in 2 widths, a 3 slat bench 416mm wide and a 4 slat bench 565mm wide.

member.

Straight and curved benches and can be manufactured. We can also supply seating that combines straight and curved benches installed to look like a single unit.

Choose from a range of material and finishes.

Optional armrest available to ensure that the Rochford seating is manufactured to suit your specific requirements.

Rochford seating is suitable for :-

- Straight seating ٠
- Curved seating ٠
- Circular seating •
- Seating for above or below ground •

Rochford products

Rochford 565 bench product details

Rochford 416 bench product details

Rochford technical specification

Rochford care & maintenance



Rochford 565 bench in natural finish FSC®-certified treated redwood

# **PRODUCT DETAILS**

#### Narrow Straight Bench

Reference: 3VSRO 01 Length: 1800mm 416mm Width: Sitting height: (AGL) 450mm Overall height: (AGL) 450mm

#### Wide Straight Bench

Reference: 3VSRO 02 Lenath: 1800mm Width: 565mm Sitting height: (AGL) 450mm Overall height: (AGL) 450mm

#### Short Narrow Bench

3VSRO 03 Reference: 400mm Lenath: Width: 416mm Sitting height: (AGL) 450mm Overall height: (AGL) 450mm

#### Straight Lounger Bench

Reference: 3VSRO 04 1800mm Length: Width: 1660mm Sitting height: (AGL) 450mm Overall height: (AGL) 450mm

#### Stepped Bench & Table

3VSRO 05 Reference: Length: 1800mm Width. 832mm Sitting height: (AGL) 450mm Overall height: (AGL) 700mm

#### **Raised Perch**

3VSRO 06 Reference: Lenath: 195mm Width: 400mm Sitting height: (AGL) 700mm Overall height: (AGL) 700mm



# Reference:

1166mm Length: 1166mm Width: 450mm Sitting height: (AGL) Overall height: (AGL) 450mm Inside radius: 750mm

3VSRO 07

#### 180° Curved Bench

90° Curved Bench

Reference: 3VSRO 08 Lenath: 2332mm Width: 1166mm Sitting height: (AGL) 450mm Overall height: (AGL) 450mm 750mm Inside radius:

### 270° Curved Bench

3VSRO 09 Reference: Lenath: 2332mm Width: 2332mm Sitting height: (AGL) 450mm Overall height: (AGL) 450mm Inside radius: 750mm

#### 360° Circular Bench

Reference: **3VSRO 10** 2332mm Length: Width: 2332mm 450mm Sitting height: (AGL) Overall height: (AGL) 450mm Inside radius: 3100mm

#### Short Table

3VSRO 11 Reference: Length: 400mm Width 416mm Overall height: (AGL) 700mm

#### Long Table

**3VSRO 12** Reference: Lenath: 1800mm 565mm Width: Overall height: (AGL) 700mm



#### Unit 35 Havhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD 01509 815335 sdl@street-design.com www.street-design.com

Notes

K Street Furniture Designers & Manufacturers

#### Straight Bench / Table combination

Reference: **3VSRO 13** 4000mm Length: 416mm Width: Sitting height: (AGL) 450mm Overall height: (AGL) 700mm

#### Straight Bench / Table combination

**3VSRO 14** Reference: 2216mm Lenath: Width: 2216mm Sitting height: (AGL) 450mm Overall height: (AGL) 700mm

#### Straight and Curved Bench combination

3VSRO 15 Reference: Length: 2966mm Width: 1166mm Sitting height: (AGL) 450mm Overall height: (AGL) 450mm Inside radius: 750mm

#### Long Bench combination with optional backrests

Reference: 3VSRO 16 Length: Width: Sitting height: (AGL) Overall height: (AGL)

#### Curved Bench / Table combination

Reference: 3VSRO 17 Length: 4248mm Width 2748mm Sitting height: (AGL) 450mm Overall height: (AGL) 700mm Inside radius: 750mm



Rochford versatile seating can be manufactured to suit your specific requirements.

Curved seating can be manufactured to most radii. Check your details with our technical department.

All products can be manufactured for above or below ground installation.

All seating can be supplied with optional armrests.

The galvanised mild steel backrest supports can be supplied with an optional polyester powder coated finish, in a range of RAL colours.

Rochford versatile products can be used in groups to create multi-use outdoor areas for sitting, eating and working.

Please contact our Sales Office on 01509 815335 for more information and assistance with your product requirements.





# 416mm WIDE BENCH DETAILS

# Rochford 416 bench without back

The Rochford 416, all timber bench consists of wide bench slats bolted to a timber end support panel. Benches can be straight, curved or a combination of both.

The bench is available with a choice of materials and finishes to suit your scheme and budget. Rochford 416 benches can be installed above or below finished ground level.

#### Materials

Slats - can be either FSC®-certified treated redwood or FSC®-certified hardwood. End support panels - can be either FSC®-certified treated redwood, FSC®-certified hardwood to match bench slats.

#### Finishes

Timber - as standard, will be supplied with a natural finish.

Optional stained finish is available on request.

#### Options

Choose whether the bench is to be straight or curved, the bench lengths, curved bench radius, material, finish and installation type.

#### Accessories

Rochford benches can be supplied with optional integrated armrests.

#### Delivery

Benches will be factory assembled and delivered to site fully assembled, for off loading and installing.

Long benches will be factory assembled in sections, dis-assembled and delivered to site for re-assembly and installation.



Rochford 416 straight bench, in natural finish FSC<sup>®</sup>-certified treated redwood

### Overall dimensions



Rochford 416 circular bench, 3VSRO 09 in natural finish FSC<sup>®</sup>-certified treated redwood

The standard

Rochford 416


curved bench will


radius of 6000mm.

Other radii can be

supplied on request.

have an internal

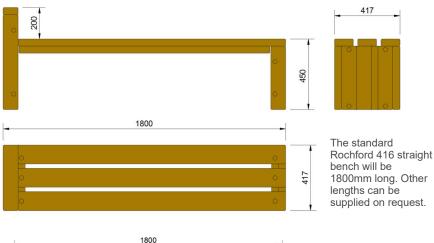

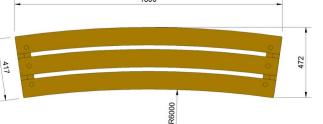




Unit 35 Hayhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD 01509 815335 sdl@street-design.com www.street-design.com

K Street Furniture Designers & Manufacturers


## Installation options

Rochford 416 straight and curved benches can be supplied for installation above or below finished ground level.

optional armrest



Above ground installation The assembled Rochford 416 bench will be secured to the finished ground level with suitable fixings for the surface type.



Below ground installation The assembled Rochford 416 bench will be set into concrete foundations 700x300x400mm deep.

# 565mm WIDE BENCH DETAILS

# Rochford 565 bench without back

The Rochford 565, all timber bench consists of wide bench slats bolted to a timber end support panel. Benches can be straight, curved or a combination of both.

The bench is available with a choice of materials and finishes to suit your scheme and budget. Rochford 565 benches can be installed above or below finished ground level.

#### Materials

Slats - can be either FSC®-certified treated redwood or FSC®-certified hardwood. End support panels - can be either FSC®-certified treated redwood, FSC®-certified hardwood to match bench slats.

#### Finishes

Timber - as standard, will be supplied with a natural finish.

Optional stained finish is available on request.

#### Options

Choose whether the bench is to be straight or curved, the bench lengths, curved bench radius, material, finish and installation type.

#### Accessories

Rochford benches can be supplied with optional integrated armrests.

#### Delivery

Benches will be factory assembled and delivered to site fully assembled, for off loading and installing.

Long benches will be factory assembled in sections, dis-assembled and delivered to site for re-assembly and installation.



Rochford 565 straight bench, in natural finish FSC<sup>®</sup>-certified treated redwood

1800

1800

R6000

### Overall dimensions


200



Rochford 565 curved bench, in natural finish FSC®-certified treated redwood

565

321



The standard Rochford 565 straight bench will be 1800mm long. Other lengths can be supplied on request.

The standard Rochford 565 curved bench will have an internal radius of 6000mm. Other radii can be supplied on request.




Unit 35 Hayhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD 01509 815335 sdl@street-design.com www.street-design.com


🚟 UK Street Furniture Designers & Manufacturers

### Installation options

Rochford 565 straight and curved benches can be supplied for installation above or below finished ground level.



Above ground installation The assembled Rochford 565 bench will be secured to the finished ground level with suitable fixings for the surface type.

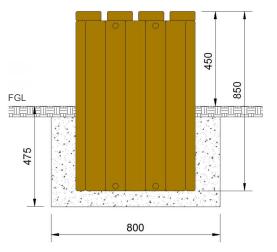

Below ground installation The assembled Rochford 565 bench will be set into concrete foundations 800x300x400mm deep.

# **TECHNICAL SPECIFICATION**

#### Construction

The Rochford all timber benches consist of timber slats bolted onto timber end panels. The timber bench slats are manufactured using FSC®-certified timber. The slats are 120x45mm section. The timber support bearer will be 45x45mm section. The timber end panels are manufactured using 95x45mm and 45x45mm section FSC®-certified timber. The end panels are constructed with an M12 internal threaded bar. Rochford benches can be supplied for above or below ground installation.

#### Assembly

Where practical, Rochford curved and straight benches and are delivered to site fully assembled for off-loading, ready for installation. Longer benches will be delivered in sections to be bolted together on site.

#### Dimensions

#### Plan dimensions:

416 Bench 1800mm long x 416mm overall width 565 Bench 1800mm long x 565mm overall width Other lengths are available on request. **Overall height** (above FGL): Bench 450mm Sitting height (above FGL): Bench 450mm high.

#### Materials

#### Timber slats

The bench and slats are manufactured using either FSC®-certified treated European redwood or FSC®-certified hardwood.

#### Timber end support panels

The timber end support panels are manufactured using either FSC®-certified treated European redwood or FSC®-certified hardwood.

### Materials - continued

#### Fixings

All fixings will be mild steel M10 and M12 size. and have a bright zinc plated finish.

## Security

Bolts will be countersunk and plugged to prevent unwanted removal.

## Options

Rochford benches are manufactured to order. Before we can manufacture the seating, we need to know the following:

- Bench type 416 or 565
- Bench length •
- Curved bench radius •
- Material •
- Material finish •
- · Accessories required
- Installation type required

#### Guarantee

Rochford benches are guaranteed for 15 years. This guarantee is dependant on the product not being misused or abused.

#### Product prices

Contact our Sales Office on 01509 815335 for Rochford bench prices delivered to site.



Unit 35 Havhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD 01509 815335 sdl@street-design.com www.street-design.com

UK Street Furniture Designers & Manufacturers

### General specification

#### Construction

All Street Design products are designed and manufactured using only quality. durable materials, construction details and fixings, to provide a long-lasting, durable product with a good life expectancy.

### Assembly

Unless otherwise stated all Rochford benches will be supplied fully assembled and delivered complete, ready for installation.

## **Timber policy**

All FSC® Certified timber products are manufactured using materials obtained from growers who operate under the Forest Stewardship Council® (FSC®). Materials

Hardwood products are constructed using FSC®-certified hardwood, from sustainable sources. Softwood products are constructed using FSC®-certified European redwood that has been pressure treated, for a desired service life of 15 vears in-ground contact.

All mild steel fixings will be bright zinc plated.

#### Finishes

As standard, the FSC®-certified timber slats will be left natural to reduce the need for re-staining and help reduce maintenance costs. Optional stained finish is available upon request.



Rochford 416 curved bench in natural FSC®-certified treated redwood



Rochford 565 straight long bench in natural FSC®-certified treated redwood

Rochford 416 'S' bench in natural FSC®-certified treated redwood



Rochford 565 mitred bench in natural FSC<sup>®</sup>-certified treated redwood

**CARE & MAINTENANCE** 



# Unit 35 Hayhill Industrial Estate Barrow upon Soar Leicestershire LE12 8LD 01509 815335 sdl@street-design.com www.street-design.com

Street Furniture Designers & Manufacturers

#### General

All Rochford seating products are manufactured using high quality materials, treatments and finishes. The timber slats are manufactured from either FSC<sup>®</sup>-certified treated redwood or FSC<sup>®</sup>-certified hardwood. All products require a varied amount of maintenance, depending on the environment, usage and weather conditions. Natural timber will only require cleaning. In time, stained timber will require re-coating.

#### Maintaining the standard FSC®-certified treated redwood finish

Natural finish treated redwood can be washed down with a mild detergent. More stubborn surface marks can be removed with a light, hand sand with a 120 grit, or higher grade sandpaper. Excessive sanding should be avoided.

#### Maintaining the standard FSC®-certified hardwood finish

Natural finish hardwood can be washed down with a mild detergent. More stubborn surface marks can be removed with a light, hand sand with a 120 grit, or higher grade sandpaper. Excessive sanding should be avoided.



#### Maintaining the optional FSC<sup>®</sup>-certified treated redwood finish

Stained, treated redwood will need to be re-coated after a period of time. The stain can either start to fade, become dull (oxidised) or incur some surface break up. Lightly sand down the timber using a 120 grit, or higher grade sandpaper. We recommend that the timber is re-stained with the original stain colour and manufacturer. Details can be obtained from Street design Limited. Apply the stain evenly, with brush strokes running parallel with the woodgrain, in thin layers, building up the finish as recommended by the stain manufacturer.



#### Maintaining the optional FSC®-certified hardwood finish

Stained hardwood will need to be re-coated after a period of time. The stain can either start to fade, become dull (oxidised) or incur some surface break up. Lightly sand down the timber using a 120 grit, or higher grade sandpaper. We recommend that the timber is re-stained with the original stain colour and manufacturer. Details can be obtained from Street design Limited. Apply the stain evenly, with brush strokes running parallel with the woodgrain, in thin layers, building up the finish as recommended by the stain manufacturer.

